


Survey of Section 6 T. 7 R. 1 E

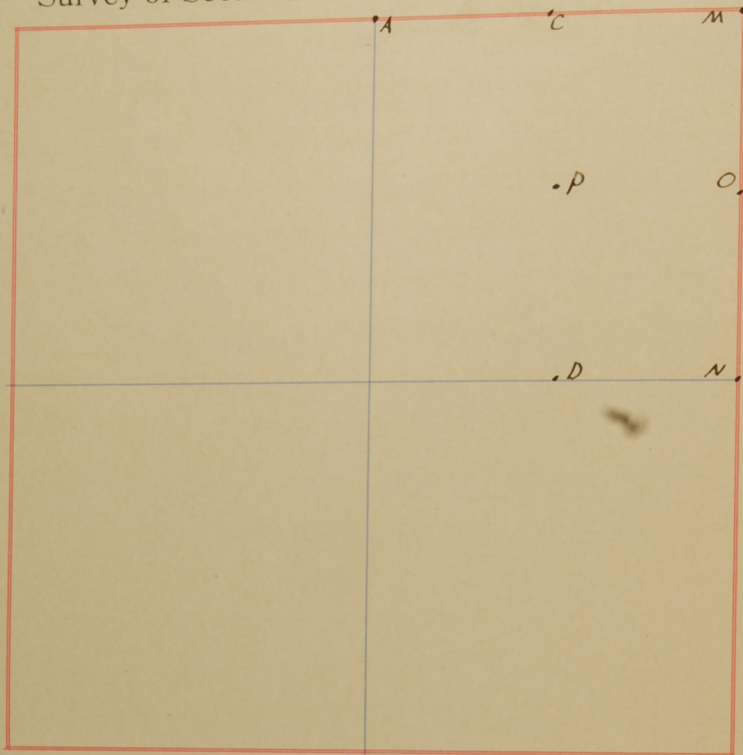

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { Oak	8	S 56½° W	26	N { Beech	20	N 30½° W	38
{ Oak	6	S 49° E	29	{ "	14	S 52½° W	16
C { Beech	20	S 31° W	69½	O { W Beech	5	N 60½° E	32½
{ Oak	22	N 31° W	66	{ Elm	24	N 83½° W	52
D { Ash	7	S 73° E	6½	P { Beech	14	N 16½° W	85
{ Oak	2½	S 68½° W	20½	{ "	15	S 59° W	40½
M { Maple	10	S 74° E	145½				
{ Stone	W.	S 45° W	30				

To be Snoddy

Aug 26
1904

Legal notice having been given I met at appointed time and place proceeded to make the following survey as per plat and notes I had for assistants Frank Corman W H May chain markers John H Hayes flag bearer all agreed upon and qualified. I hereby certify the foregoing to be a correct report of the survey made by me as I verily believe. In witness whereof I attach my hand and seal

C M Bourrs

Bearings	Distances
30 1/2° W	38
52 1/2° W	16
60 1/2° E	32 1/2
83 1/2° W	62
16 1/2° W	85
59° W	44 1/2